


Series PW

Quick Disconnect Couplings



Series PW

Series PW includes free flow couplings for water, steam and other media used in industrial applications.

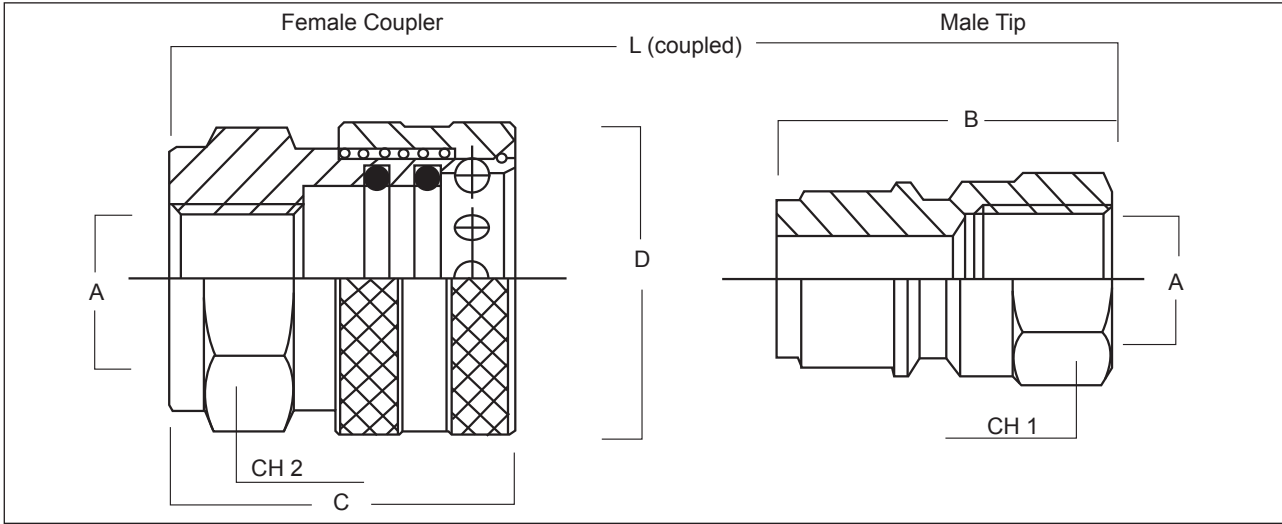

Dimensions										
Size Base	Ø DN mm	Code		Ø A 3/8" BSP	B mm	C mm	Ø D mm	L mm	CH 1 mm	CH 2 mm
		Male Tip	Female Coupler							
06	10	PWM0006	PWF0006		38	39	35	53.5	22	30

Performance Data

Size Base	Ø DN		Max. Working Pressure		Burst Pressure		Weight Kg	
	mm	inch	bar	psi	bar	psi	Male Tip	Female Coupler
06	10	3/8"	250	3600	625	9000	0.020	0.070

Series PW

Quick Disconnect Couplings



Accessories

Part Number (Complete Coupler)	Seal Kit	Dust Cap (Protects Tip)	Dust Plug (Protects Body)	Colour
PWC0006	PWSK0006			

Replacement Seal Kits

Replacement seal kits are available for most models. Leakage between the female body half (coupling) and the male tip half (nipple) is an indication that the body o-ring needs replacement.



Dust Caps & Dust Plugs

Protective dust caps and dust plugs are available in rubber in a variety of sizes. They should be used whenever possible to help reduce contamination of the hydraulic system and improve service life of the body half (coupling) and the mating tip half (nipple).

