


FPMD15DVD1





Relief Valves


Features

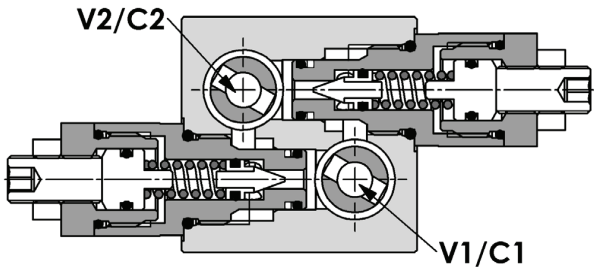

- FPMD15DVD1 series valves are a dual cross main pressure relief valve, flangeable on Danfoss motors 'OMM' series and White WM series.
- Cartridges are manufactured from zinc plated steel. Internal parts are in hardened steel. Body is in high strength aluminium alloy, drilled screw in zinc plated steel.

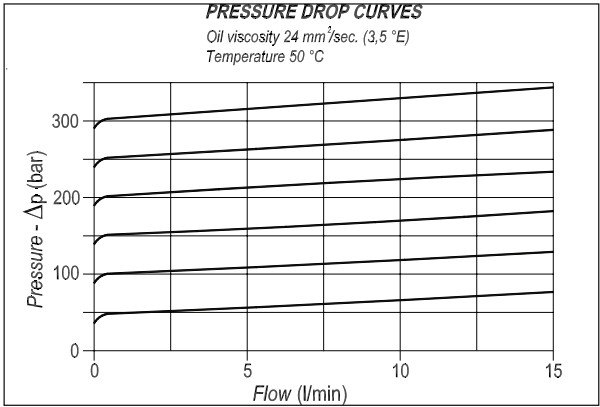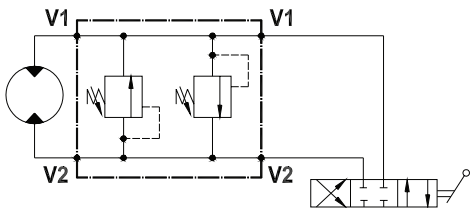

TECHNICAL DATA	
Rated Flow	15 l/min
Max. Setting	350 bar
Adjustment Means	leakproof screw or handknob (P/R)

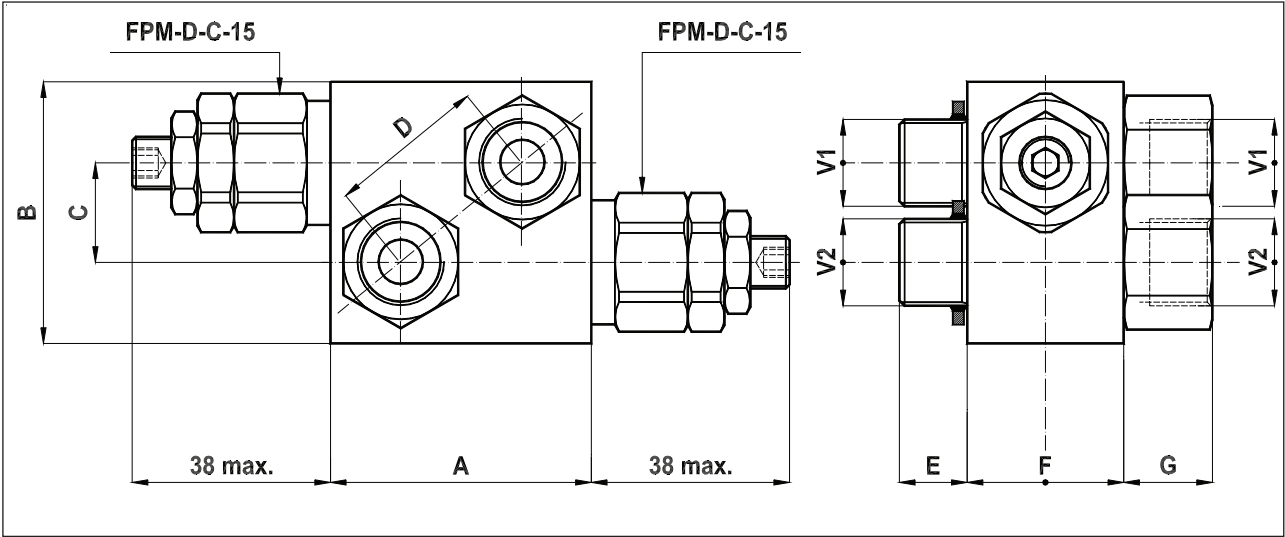




Type	Maximum Flow	Maximum Pressure	V1 V2	A	B	C	D	E	F	G	Weight
	l/min	Bar	BSPP	mm	mm	mm	mm	mm	mm	mm	Kg
FPMD 15 DV D1 P 3/8	15	350	3/8"	50	50	19	30.4	13	30	17	0.550


FPMD15DVD1



Relief Valves

SPRINGS				
Code *	Adjustable pressure range bar	Pressure increase bar/turn	Standard setting bar	Colour
05	5-60	15	5	White
10	20-130	30	20	Yellow
20	40-240	65	40	Green
35	50-350	100	50	Red

Adjustments		FPM D 15 DV D1
* P	Leakproof hex. socket screw	
* R	Handknob and locknut	
* Z	Tamperproof cap	

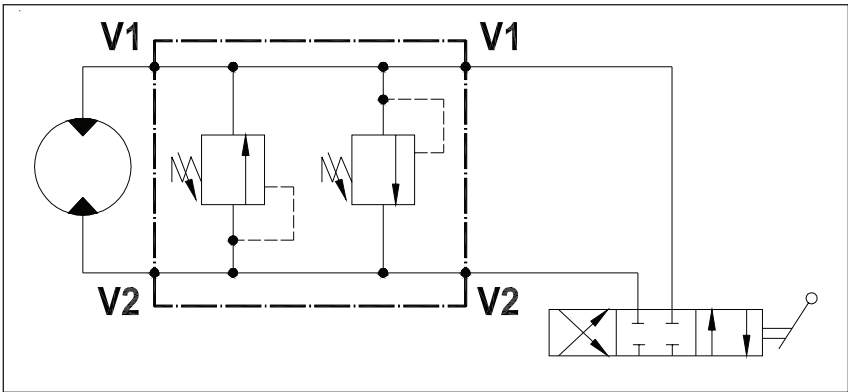

HOW TO ORDER

	FPM	D	15	DV	D1	P	3/8	20	*	
Basic code	_____	_____	_____	_____	_____	_____	_____	_____	_____	Seals Omit if BUNA N
Direct acting	_____	_____	_____	_____	_____	_____	_____	_____	_____	* V = Viton
Dimension	_____	_____	_____	_____	_____	_____	_____	_____	_____	"05" / "10" / "20" / "35": * Adjustable pressure range
Dual cross drilled screw version	_____	_____	_____	_____	_____	_____	_____	_____	_____	* 3/8: Port sizes body
Flangeable on 'OMM' Danfoss motors	_____	_____	_____	_____	_____	_____	_____	_____	_____	* P/R/Z: Adjustments