


ELFB400 Series

Solenoid Operated Selector Valves




ELFB-400-ESFN - Solenoid Operated 6 Port Selector Valves

**	Circuit	Transit position
01		

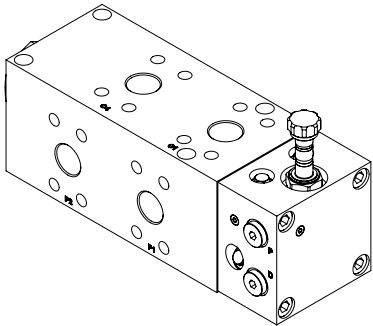


Technical data			
Rated flow		l/min	400
Operating pressure	with internal drain "N"	bar	210
	with external drain "E"	bar	420
Minimum pilot pressure		bar	20
Valve weight		Kg	17,2
Standard Ports		1" SAE 6000	

Mounting example

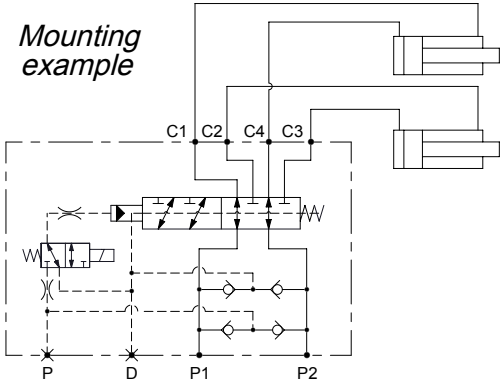

OVERALL DIMENSIONS

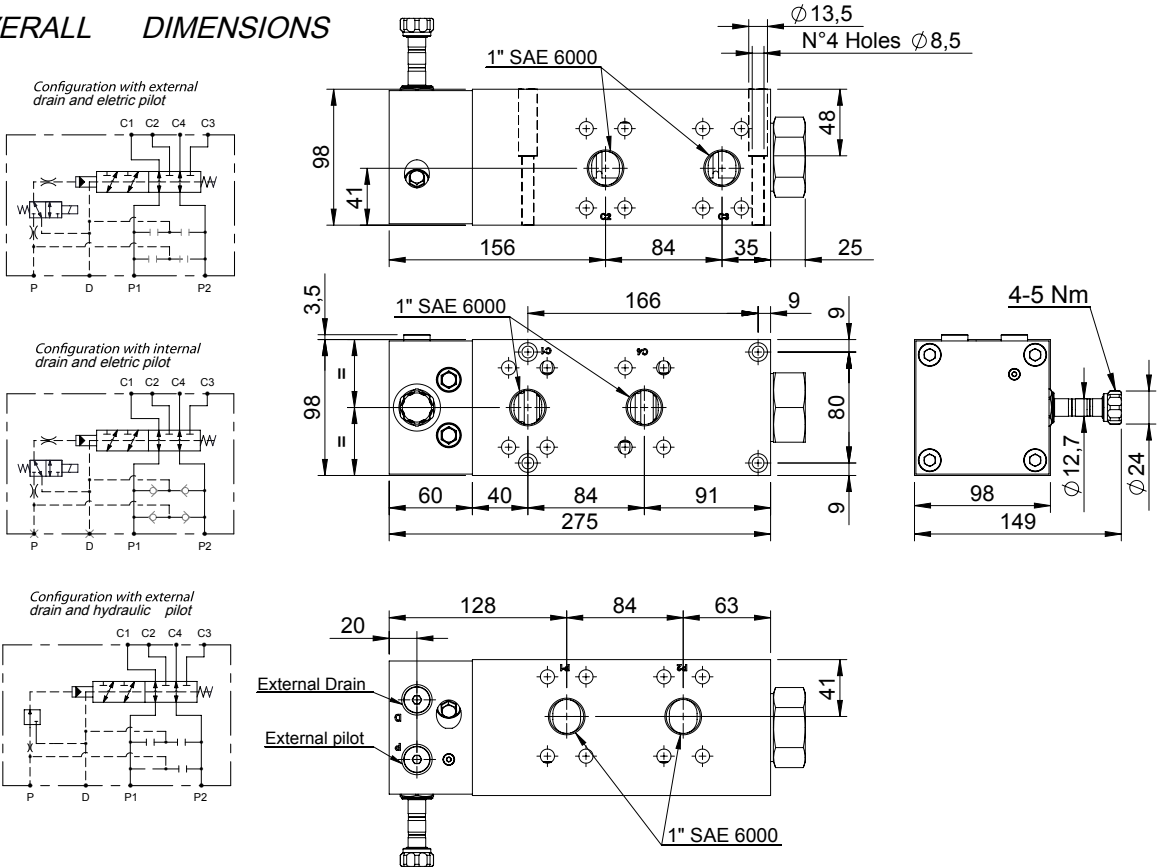


ELFB400 Series

Solenoid Operated Selector Valves



Characteristic curves

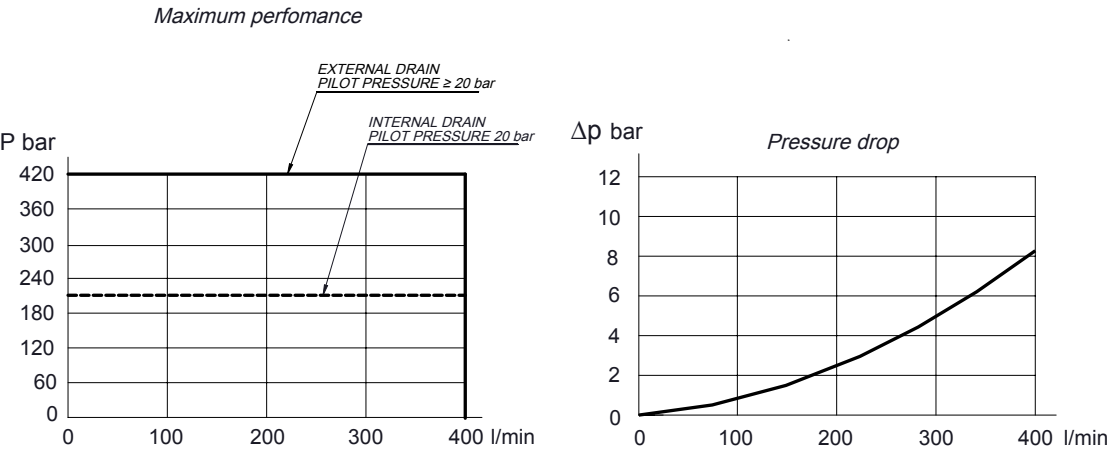

*	OPERATED	Circuit	*	DRAIN	Circuit	PORTS		
						***	Main (C)	Drain (D) Pilot (P)
H	Hydraulic		N	Internal		S10	1" SAE 6000	1/4" Gas
E	Electric		E	External		G34	G 3/4"	1/4" Gas
Max. pilot pressure with external drain: 250 bar								

Special port sizes available

N - Seals in NBR
V - Seals in VITON

ELFB - 400 - * N F * - 01 - *** - * ** *

*	Voltage (V)	Resistance (Ω) $\pm 7\%$	Power (W)	Current (A)	*	COIL	Type	Protection class
-	Without coil				-	Without coil		
A	12 DC	7,4	20	1,62	HR	DIN 43650 - ISO 4400 Class H	M7	IP65
B	24 DC	28,5	20	0,85	AJ	AMP JUNIOR Class H	M7	IP65
Special voltages available on request					DT	DEUTSCH DT04-2P-L Class H	M7	IP69